

# Installation & CARE

## 2005-2009 CHEVY EQUINOX HEADLIGHTS INSTALLATION INSTRUCTIONS

### BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at local a automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautions when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED

1/4" Ratchet	7 mm socket	10 mm socket	Socket extension
			
Plastic Pry bar			
			

### PRODUCT NUMBER

2LH-EQIX05-ABM  
2LH-EQIX05JM-ABM  
2LH-EQIX05G-ABM



### LET'S START THE INSTALLATION



**STEP 1**

Remove the front grill molding




**STEP 2**

Remove the front grill molding




**STEP 3**

Remove one 10mm and two 7mm bolts

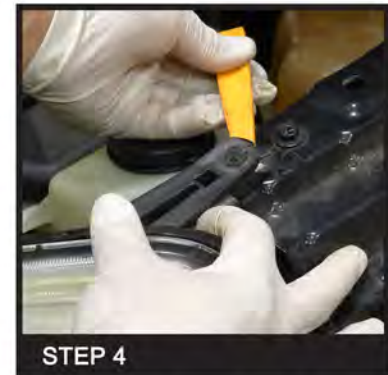

**STEP 4**

Pull up the top mounting bracket

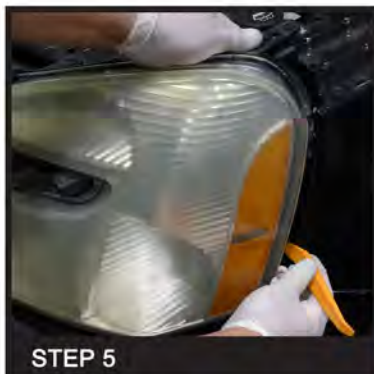


**STEP 5**

Unseat the factory headlights



**STEP 6**

Dicconnect the headlights harness and remove the factory headlights

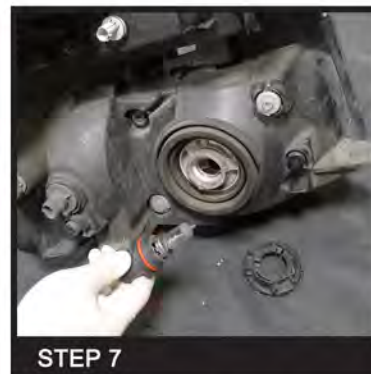

**STEP 7**

Remove all headlights bulbs from the factory headlights



**STEP 8**

Transfer all headlights bulbs to the new headlights



STEP 9

Connect the headlights harness




STEP 10

Install the headlights



STEP 11

Reinstall one 10mm and two 7mm bolts

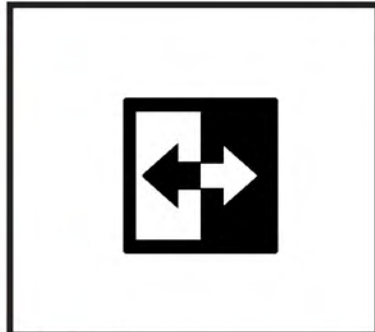

STEP 12

Please repeat the steps from 3 to 11 for the opposite side



STEP 13

Reinstall the front grill molding



The installation is now complete

### 2005-2009 CHEVY EQUINOX HEADLIGHTS BACK VIEW

## High/Low Beam Adjustment Screws

