

# INSTALLATION & CARE

## 2019-UP DODGE RAM 1500 OE STYLE HEADLIGHT INSTALLATION INSTRUCTION

### BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED

### PRODUCT NUMBER

1/4" Ratchet	10 mm Socket	8 mm Socket	6" Socket Extension
Trim Pad Remover	10mm Wrench		

2LH-RAM1915-RS

2LH-RAM1915G-RS

2LH-RAM1915JM-RS

2LH-RAM1915SM-RS

### LET'S START THE INSTALLATION



Remove the twelve plastic fasteners on the radiator upper support cover



Remove the radiator upper support cover



Remove the eight 10mm bolts at the top of the upper grille trim



Remove the upper grille trim



Remove the four 8mm bolts on the fender liner



Pull away the fender liner



**STEP 7**

Remove the 10mm bolt



**STEP 8**

Grab the edge and pull forward to unseat the filler panel



**STEP 9**

Grab the other end and pull out to remove the filler panel, repeat for the other side



**STEP 10**

Remove the three 10mm bolts at the bottom of the front grille



**STEP 11**

Remove the four 10mm bolts at the top of the front grille



**STEP 12**

Unseat the front grille upper leg for both side




**STEP 13**

Remove the front grille



**STEP 14**

Remove the 10mm bolt at the bottom of the headlight

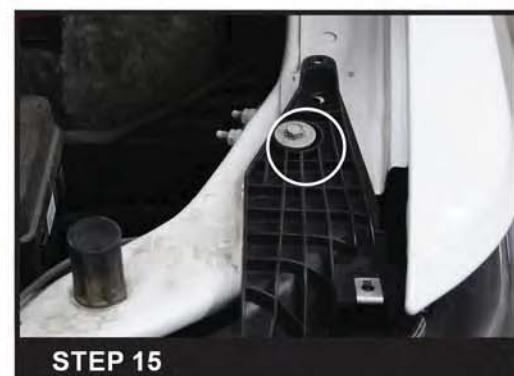

**STEP 15**

Remove the 10mm bolt at the top of the headlight




**STEP 16**

Unseat the factory headlight housing



**STEP 17**

Disconnect the headlight harness and remove the factory headlight housing

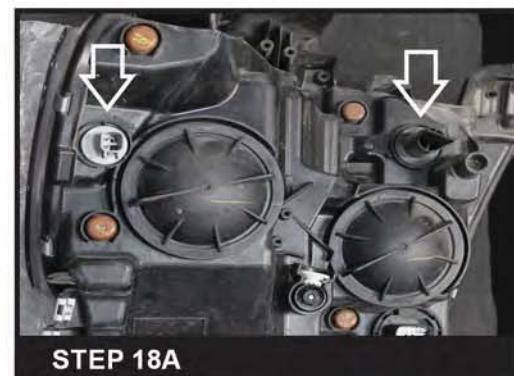

**STEP 18A**

Remove the signal light socket and the parking light socket from the factory headlight housing




**STEP 18B**

Remove the high beam and the low beam light bulbs from the factory headlight housing



**STEP 19**

Remove the signal light bulb from the signal light socket

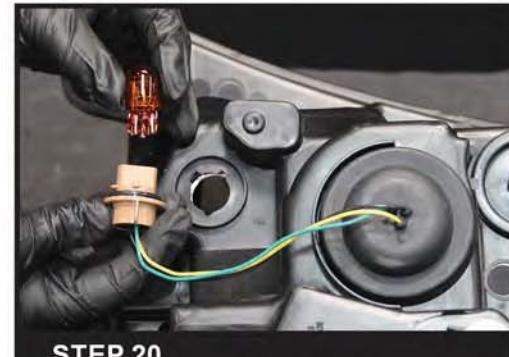

**STEP 20**

Reinstall the signal light bulb to the new headlight housing signal light socket



**STEP 21**

Reinstall the high beam light bulb to the new headlight housing



**STEP 22**

Reinstall the low beam light bulb to the new headlight housing



**STEP 23**

Reinstall the parking light socket to the new headlight housing



**STEP 24**

Connect the headlight harness



**STEP 25**

Seat the new headlight assembly in place



**STEP 26**

Reinstall the 10mm headlight bolt at the top of the headlight




**STEP 27**

Reinstall the 10mm headlight bolt at the bottom of the headlight



**STEP 28**

Please repeat the steps from 13 to 27 for the opposite side

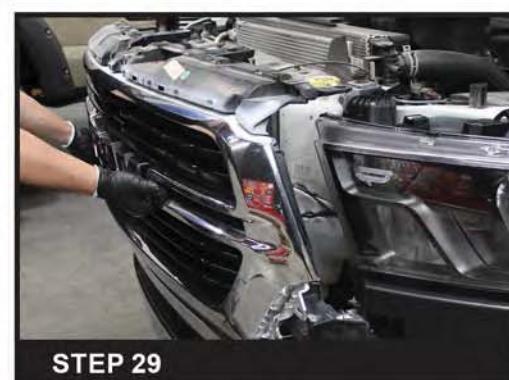

**STEP 29**

Reinstall the front grille



**STEP 30**

Reinstall the three 10mm bolts at the bottom of the front grille



**STEP 31**

Reinstall the four 10mm bolts at the top of the front grille



**STEP 32**

Reinstall the filler panel



**STEP 33**

Pull away the fender liner and reinstall the 10mm bolt



**STEP 34**

Reinstall the fender liner and the four 8mm bolts



**STEP 35**

Reinstall the upper grille trim




**STEP 36**

Reinstall the eight 10mm bolts at the top of the upper grille trim



**STEP 37**

Reinstall the radiator upper support cover

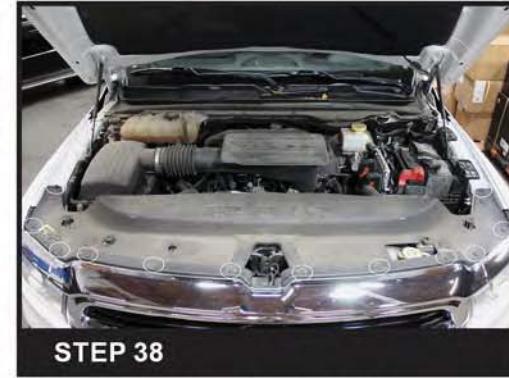

**STEP 38**

Reinstall the twelve plastic fasteners on the radiator upper support cover



**STEP 39**

Close the hood to complete the installation

