

INSTALLATION & CARE

2002-2006 DODGE RAM LED TAIL LIGHTS INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

¼" Ratchet	Trim Pad Remover	¼" Drive T20 Torx Bit	Flathead screwdriver
			

PRODUCT NUMBER


LT-RAM02RLED-G2-TM LT-RAM02CLED-G2-TM
 LT-RAM02GLED-G2-TM LT-RAM02BBLED-G2-TM

LET'S START THE INSTALLATION



STEP 1

Remove the two T25 bolts

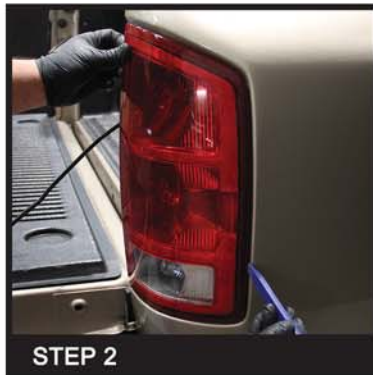

STEP 2

Uninstall the tail light housing



STEP 3

Unlock the tail light harness



STEP 4

Disconnect the tail light harness and then remove the tail light housing



STEP 5

Connect the new tail light harness



STEP 6

Lock the tail light harness



STEP 7

Install the new tail light housing



STEP 8

Tighten the two T25 bolts



STEP 9

Please repeat the steps from 1 to 8 for the opposite side



STEP 10

Close the tailgate to complete the installation

