

INSTALLATION & CARE

2002-2006 DODGE RAM LED TAIL LIGHTS INSTALLATION INSTRUCTIONS

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED


1/4" Ratchet	Trim Pad Remover	1/4" Drive T20 Torx Bit	Flathead screwdriver
			

PRODUCT NUMBER


LT-RAM02BBLED-G2-TM
LT-RAM02BKLED-G2-TM
LT-RAM02GLED-G2-TM
LT-RAM02JMLED-G2-TM
LT-RAM02RLED-G2-TM

LT-RAM02BBLED-TM
LT-RAM02CLED-TM
LT-RAM02GLED-TM
LT-RAM02JMLED-TM
LT-RAM02RLED-TM


LET'S START THE INSTALLATION

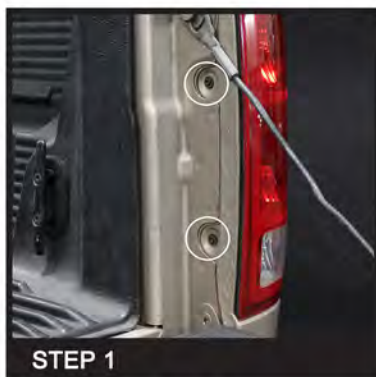


Remove the two T25 bolts

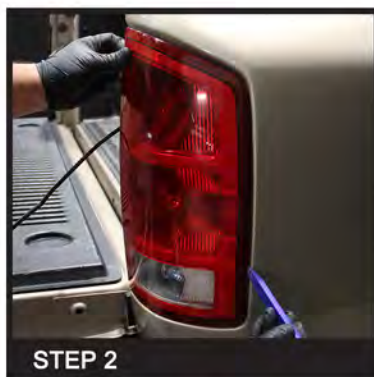

Uninstall the tail light housing

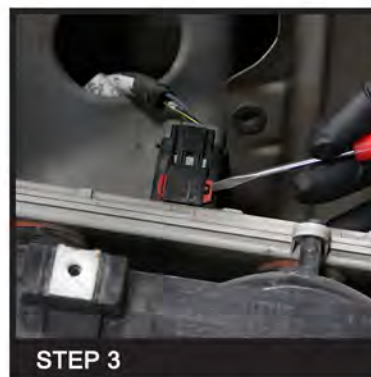

Unlock the tail light harness

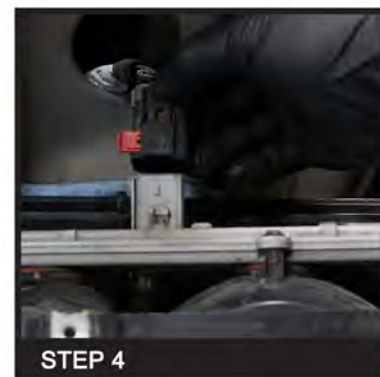


Disconnect the tail light harness and then remove the tail light housing




Connect the new tail light harness



Lock the tail light harness

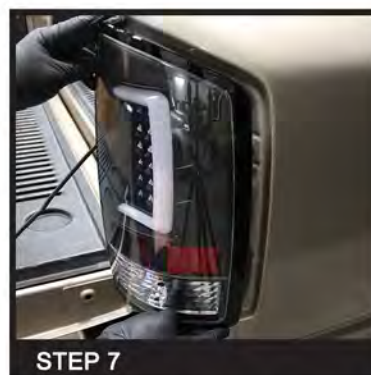

Install the new tail light housing

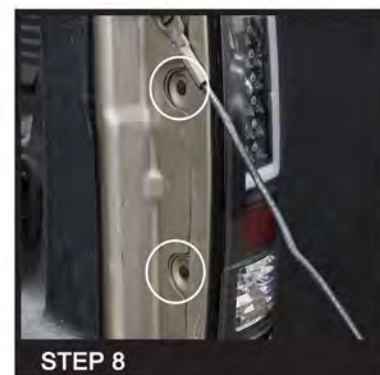

Tighten the two T25 bolts



STEP 9

Please repeat the steps from 1 to 8 for the opposite side



STEP 10

Close the tailgate to complete the installation

