

INSTALLATION & CARE

2007-2008 DODGE RAM 1500 LED TAIL LIGHT INSTALLATION INSTRUCTION

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

1/4" Ratchet	Trim Pad Remover	1/4" Drive T25 Torx Bit	
			

PRODUCT NUMBER

LT-RAM07RLED-G2-TM
LT-RAM07JMLED-G2-TM
LT-RAM07GLED-G2-TM

LT-RAM07BKLED-G2-TM
LT-RAM07BBLED-G2-TM



LET'S START THE INSTALLATION



STEP 1

Remove the (2) T25 bolts



STEP 2

Uninstall the tail light housing



STEP 3

Disconnect the tail light harness and then remove the tail light housing




STEP 4

Connect new tail light harness



STEP 5

Connect new tail light harness

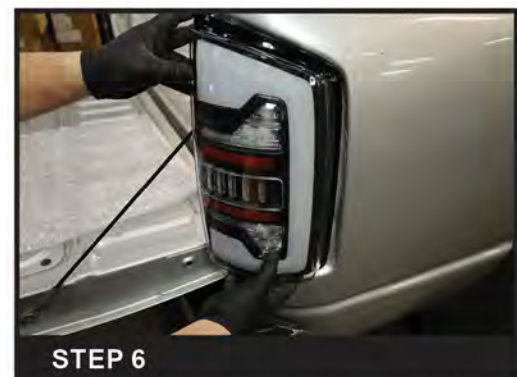

STEP 6

Seat the new LED tail light assembly in place




STEP 7

Reinstall the (2)T25 bolts



STEP 8

Repeat steps for other side

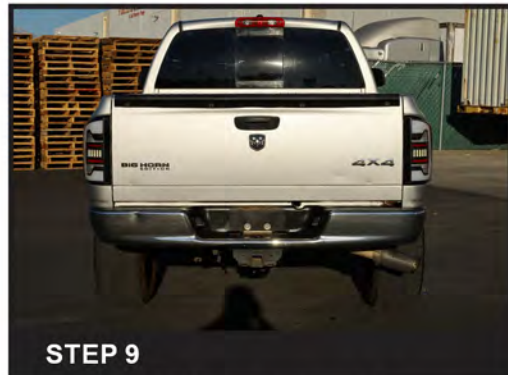

STEP 9

Close the tailgate to complete the installation



2007-2008 DODGE RAM 1500 LED TAIL LIGHT INSTALLATION INSTRUCTION

BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

2007-2008 DODGE RAM 1500 LED TAIL LIGHT INSTALLATION INSTRUCTION

