



## 2005-2007 FORD ESCAPE DUAL HALO SMD LED PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

### TOOLS AND SUPPLIES REQUIRED



1/4" Ratchet

6" Extension

10mm Socket

Screwdriver

If your Headlight is Halo type, you also need:



Wire Stripper

Wire Crimper

4 Blue Quick Splice Wire Connectors

4 Blue Male Quick Wire Connectors

4 Blue Female Quick Wire Connectors

2 Red Wires (8 inch)

2 Black Wires (8 inch)

### Product Part Numbers:

2LHP-ECAP05-RS

2LHP-ECAP05JM-RS

2LHP-ECAP05G-RS



**FORD ESCAPE DUAL HALO SMD LED PROJECTOR HEADLIGHTS  
INSTALLATION INSTRUCTIONS**

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.



1. Before



2. (2) plastic clips and (4) 10mm bolts location



3. Remove the (4) 10mm bolts



4. Remove the (2) plastic clips



5. (3) 10mm bolts location



6. Remove the (3) 10mm bolts



7. (3) plastic clips location



8. Remove the (3) 10mm bolts



9. Remove the plastic clips



10. (2) 10mm bolts location



11. Remove the (2) 10mm bolts



12. Remove the front bumper



13. Remove the 10mm bolt



14. (2) 10mm bolts location



15. Remove the factory headlight



16. Remove the light socket



17. Disconnect the headlight harness



18. Connect the headlight harness to the new headlight

Please see the "L. E. D. and Halo headlights installation instructions"  
If your headlights don't have L.E.D. You can skip the installation instruction.



19. Install the light socket



20. Place the new headlight in the stock location



21. Tighten the (2) 10mm bolt



22. Replace the front bumper



23. Tighten the (2) 10mm bolts




24. Install the plastic clip



25. Replace the (3) plastic clips



26. Replace the (2) plastic clips

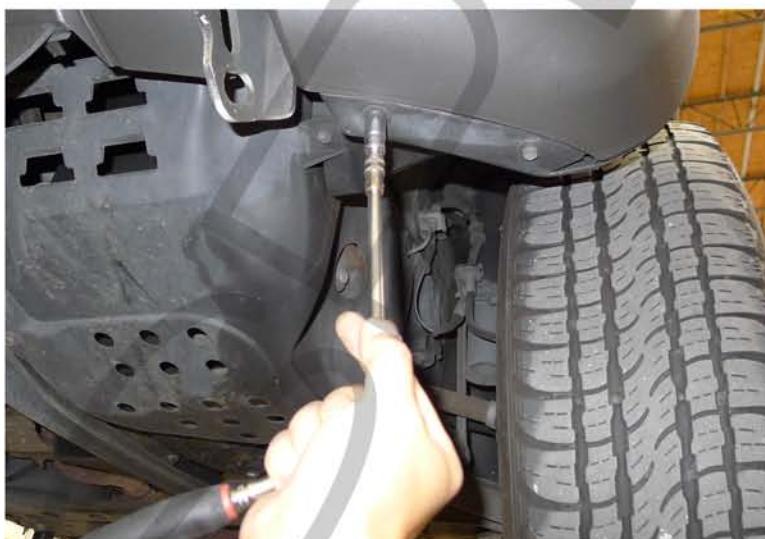

27. Tighten (7) 10mm bolts



28. The installation is now complete