



# 2004-2008 FORD F150 PROJECTOR HEADLIGHTS GL INSTALLATION INSTRUCTIONS

- \*If you experience any difficulties that the instructions did not cover, Please seek assistance at local automotive shop.
- \*Please wear protection before you work on your vehicle.
- \*An assistant is useful when removing the front bumper from your vehicle.
- \*Please be cautious when working with the bumper or any parts belonging to the vehicles' body prevent scratching.
- \*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



## TOOLS AND SUPPLIES REQUIRED

1/4" Drive Ratchet  
8mm Socket  
10mm Socket

If your Headlight is Halo type, you also need:  
Wire Stripper  
Wire Crimper  
4 Blue Quick Splice Wire Connectors  
4 Blue Male Quick Wire Connectors  
4 Blue Female Quick Wire Connectors  
2 Red Wires (8 inch)  
2 Black Wires (8 inch)

## Product Part Numbers:

2LHP-F15004-8-RS  
2LHP-F15004JM-8-RS  
2LHP-F15004G-8-RS



**2004-2008**  
**FORD F150 PROJECTOR HEADLIGHTS GL**  
**INSTALLATION INSTRUCTIONS**

- \*If you experience any difficulties that the instructions did not cover, Please seek assistance at local automotive shop.
- \*Please wear protection before you work on your vehicle.
- \*An assistant is useful when removing the front bumper from your vehicle.
- \*Please be cautious when working with the bumper or any parts belonging to the vehicles' body prevent scratching.
- \*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



1. 10mm and 8mm bolt locations



2. Remove the 10mm bolt



3. Remove the 8mm bolt



4. 10mm bolt location



5. Remove the 10mm bolt




6. Remove the headlight



7. Disconnect the headlight harness



8. Remove the headlight harness

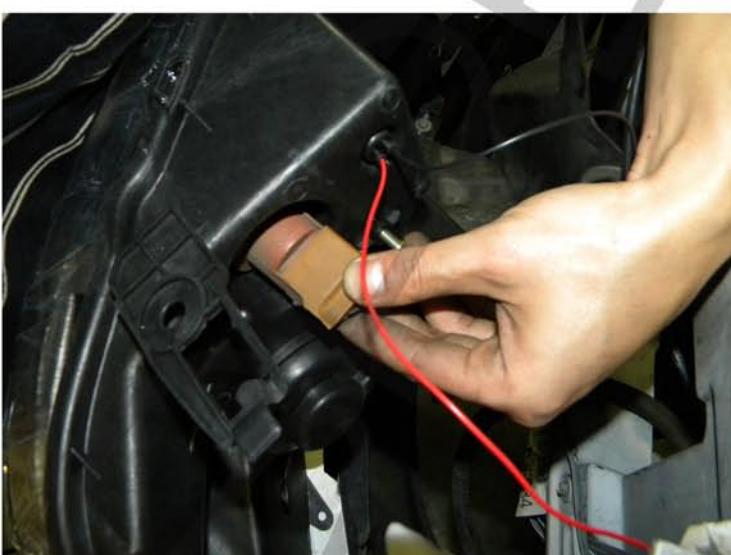

9. Connect the headlight harness to the new light

Please see the "Halo and L.E.D installation instructions"  
If your headlights don't have HALO or L.E.D. you can skip  
this step




10. Connect the headlight harness to the new headlight



11. Connect the headlight harness to the new headlight




12. Place the new headlight into the stock location

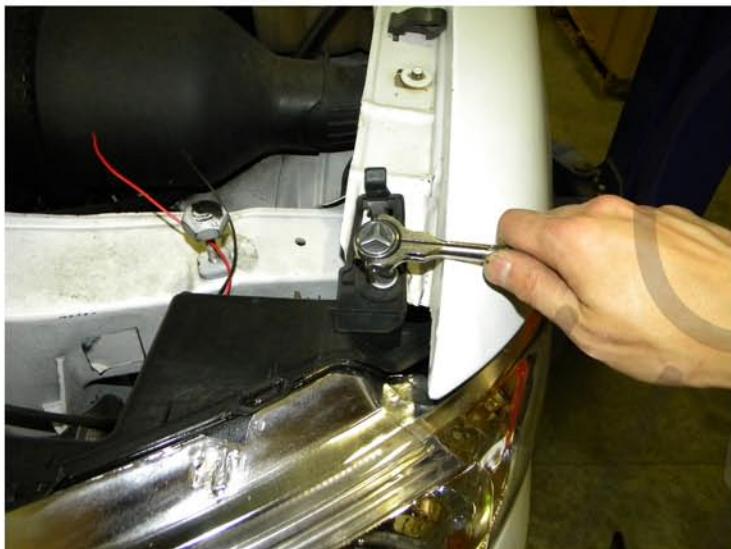

13. Tighten the 10mm bolt



14. Tighten the 8mm bolt

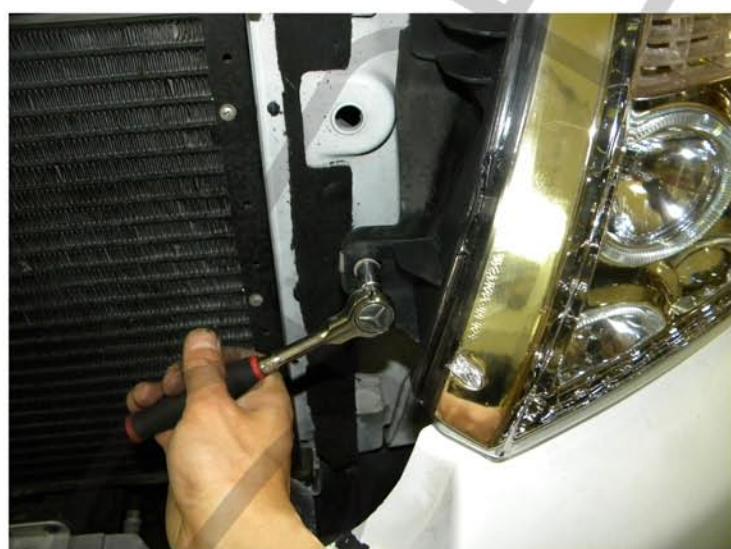

15. Tighten the 10mm bolt

Please repeat the steps in order from 1 to 15 for the opposite side



16. The installation is now complete