

# INSTALLATION & CARE

SPEC-D  
Tuning

INNOVATE

PROFESSIONAL

SERVICE

## 2009-2014 FORD F150 LIGHT BAR PROJECTOR HEADLIGHT INSTALLATION INSTRUCTIONS

### BEFORE INSTALLATION:

- If you experience any difficulties that the instructions did not cover, please seek assistance at a local automotive shop.
- Please wear proper protective equipment before you work on any vehicle.
- An assistant is recommended when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.


### TOOLS AND SUPPLIES REQUIRED

1/4" Ratchet	Plastic Pry bar	10 mm socket	Trim Pad Remover

### PRODUCT NUMBER

2LHP-F15009-G2-TM  
2LHP-F15009JM-G2-TM  
2LHP-F15009BK-G2-TM  
2LHP-F15009G-G2-TM

### LET'S START THE INSTALLATION

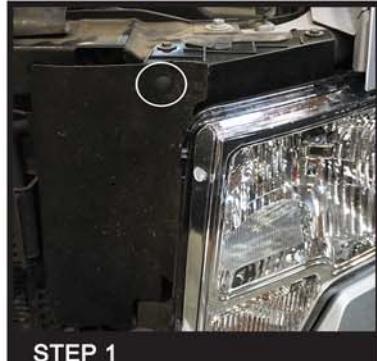


STEP 1



STEP 2



STEP 3

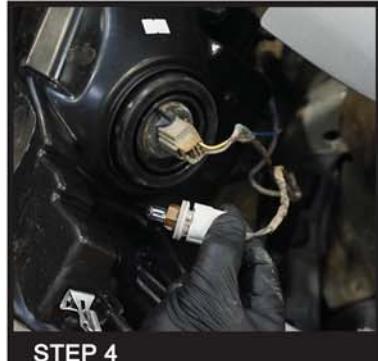

STEP 4

Reinstall the plastic fastener clip


Remove the three 10mm headlight mounting bolts

Unseat the factory headlight housing


Disconnect the headlight harness and remove the factory headlight housing



STEP 5

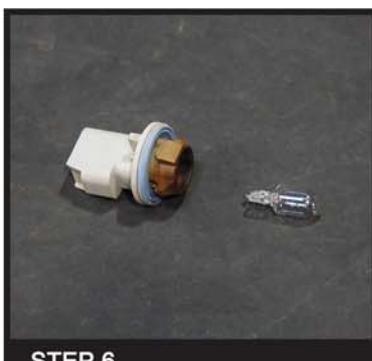


Remove the parking light bulbs from the socket

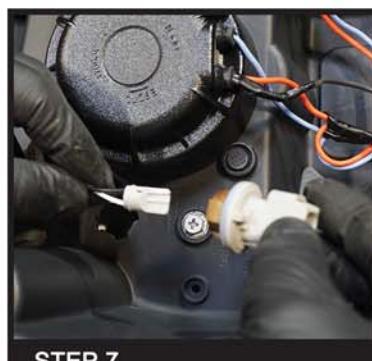

STEP 7

Install the parking light socket to the new headlight housing, (+) to (+) and (-) to (-)

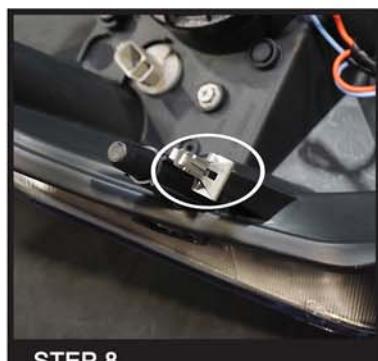

STEP 8

Remove the parking light socket and the metal clip

Install the metal clip to the new headlight housing



**STEP 9**

Connect the headlight harness



**STEP 10**

Seat the new headlight assembly in place



**STEP 11**

Reinstall the two 10 mm headlight mounting bolts at the top



**STEP 12**

Reinstall the 10mm headlight mounting bolt



**STEP 13**

Reinstall the plastic fastener clip



**STEP 14**

Please repeat the steps from 1 to 13 for the opposite side



**STEP 15**

Close the hood and complete the installation

