

Installation & CARE

2011-2013, 2014-2015 FORD FIESTA HATCHBACK LED TAIL LIGHTS INSTALLATION

BEFORE INSTALLATION

- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

¼" Ratchet	Trim Pad Remover	T25	Phillips Screwdriver
			

PRODUCT NUMBER

LT-FST115CLED-TM
 LT-FST115RLED-TM
 LT-FST115GLED-TM
 LT-FST115RGLED-TM



LET'S START THE INSTALLATIONS




STEP 1

Before installation




STEP 2

Open the rear hatch

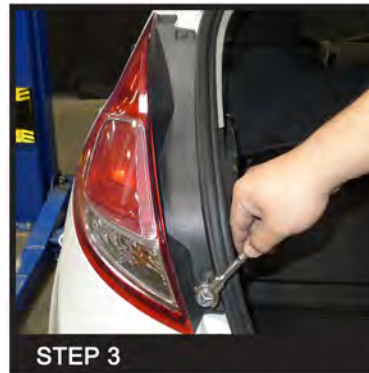


STEP 3

Remove the (2) T25 bolts

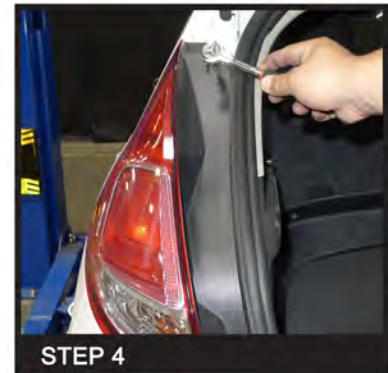


STEP 4

Remove the T25 bolts

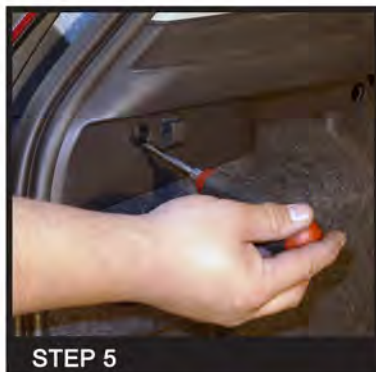

STEP 5

Remove the Phillips head screw

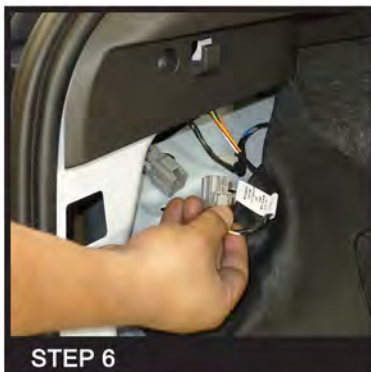


STEP 6

Disconnect the taillight harness



STEP 7

Remove the factory taillight

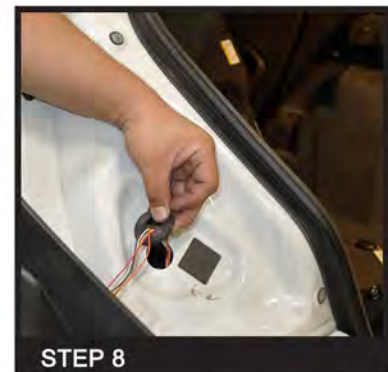


STEP 8

Remove the taillight harness with the factory taillight



STEP 9

Place the new LED taillight in the factory location

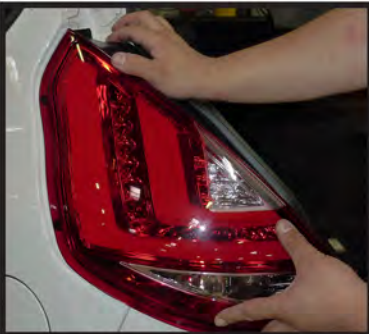

STEP 10

Place the new LED taillight in the factory location



STEP 11

Tighten the (2) T25 bolts



STEP 12

Tighten the T25 bolts



STEP 13

Please see the "L. E. D. tail lights installation instruction" If your tail lights don't have L.E.D. You can skip the installation instruction. Connect the tail-light harness to the LED taillight



STEP 14

Tighten the Phillips head screw



STEP 15

Please repeat the steps from 1 to 14 for the opposite side



STEP 16

The installation now is complete