

*If you experience any difficulties that the instruction did not cover, Please seek local auto shop for advise.



*Please wear protection before you work on your vehicle.

*An assistant is helpful when removing the front bumper.

*Please be careful while working with the bumper or body part to avoid scratching.

*Do not make direct contact with the halogen bulb or the wire assembly until the unit has cooled down after use.



Figure 1.

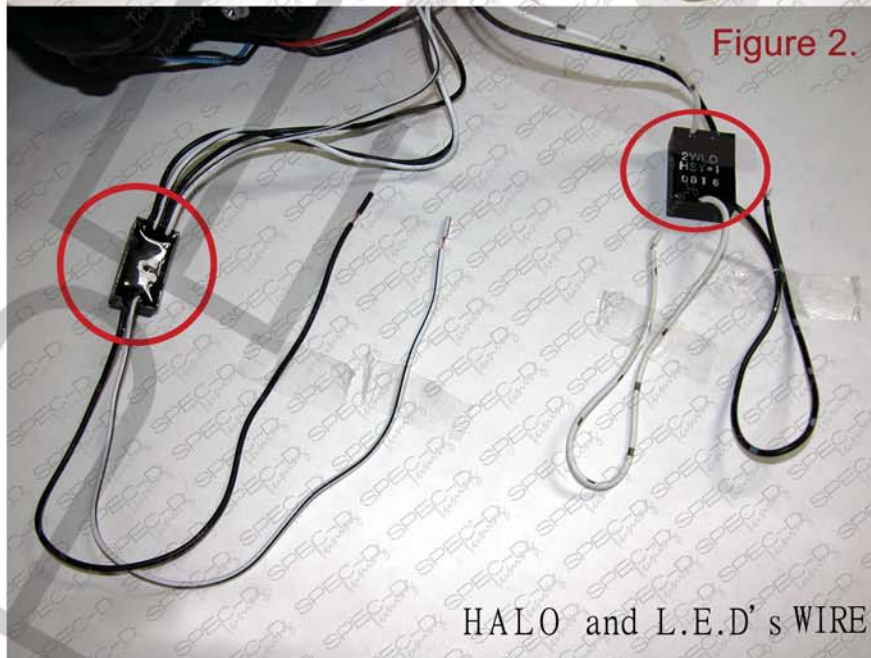


Figure 2.

HALO and L.E.D' s WIRE

1. Connect the Black Wire from **(Figure 2)** to the ground wire (-) of the driving lights
2. Connect the White Wire from **(Figure 2)** to the positive wire (+) of the driving lights
3. You can also connect the Black wire from Halo and L.E.D. wire in (Figure 2) together on the ground wire (-) of the driving light. Connect the White wire from Halo and L.E.D. wire in (Figure 2) on the positive wire (+) of driving light

Warning :

Please avoid damaging the black resistor during installation. Otherwise, it may cause damages to the light.