

Installation & CARE

2003-2005 HONDA ACCORD 4DR HEADLIGHTS

BEFORE INSTALLATION

- If you experience any difficulties that the instruction did not cover, please seek assistance at local automotive shop.
- Please wear protection before you work on any vehicle.
- An assistant is useful when removing the front bumper from your vehicle.
- Please be cautious when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.
- Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

1/4" ratchet	6" Extension	10mm Socket	Phillips Screwdriver
			
Trim Pad Remover			
			

PRODUCT NUMBER

2LH-ACD03-RS
2LH-ACD03JM-RS




LET'S START THE INSTALLATIONS




STEP 1

Before installation

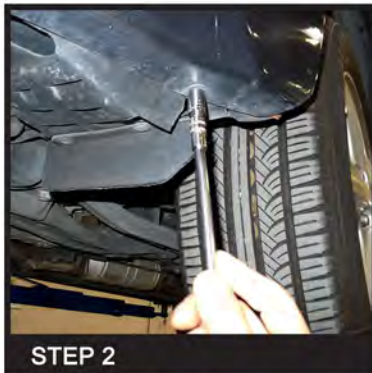


STEP 2

Remove the 4 10mm bolts

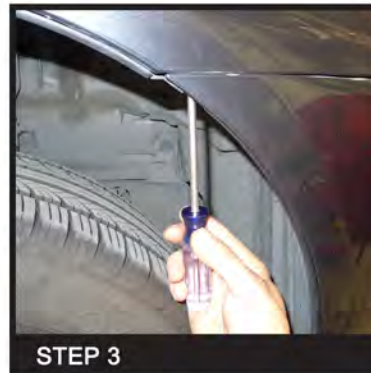

STEP 3

Remove the phillips head screw

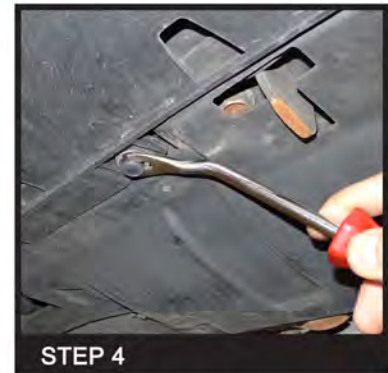

STEP 4

Remove the 4 plastic clips



STEP 5

10 plastic clips location



STEP 6

Remove the 10 plastic clips



STEP 7

Remove the plastic cover




STEP 8

Remove the front bumper



STEP 9

Disconnect the foglight harness

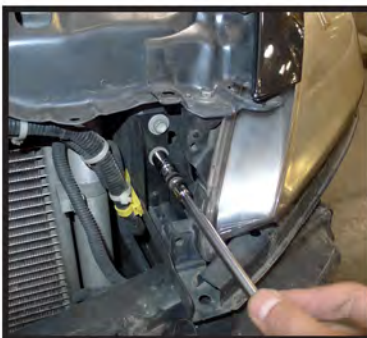

STEP 10

Remove the 2 10mm bolts



STEP 11

Remove the 10mm bolt



STEP 12

2 10mm bolts location



STEP 13

Remove the 2 10mm bolts




STEP 14

Remove the factory headlight



STEP 15

Disconnect the headlight harness

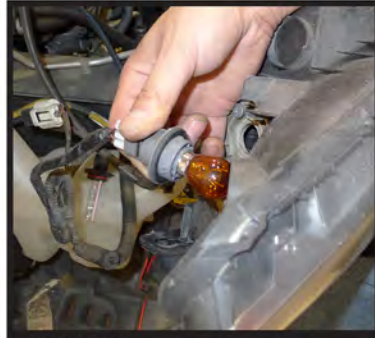

STEP 16

Disconnect the light socket



STEP 17

Remove the 10mm bolt



STEP 18

Remove the metal bracket



STEP 19

Place the metal bracket on the new headlight



STEP 20

Tighten the 10mm bolt



STEP 21

Connect the headlight harness. Please see the "Halo & LED headlights installation instructions" If your headlights don't have Halo and led, you can skip the instruction




STEP 22

Install the light socket



STEP 23

Place the new headlight in the stock location

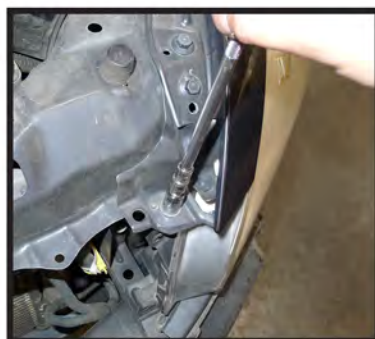

STEP 24

Tighten the 2 10mm bolts



STEP 25

Tighten the 10mm bolt



STEP 26

Tighten the 2 10mm bolts



STEP 27

Connect the fog light harness



STEP 28

Replace the front bumper



STEP 29

Replace the plastic cover



STEP 30

Replace the 10 plastic clips




STEP 31

Tighten the phillips head screw



STEP 32

Replace the 4 plastic clips

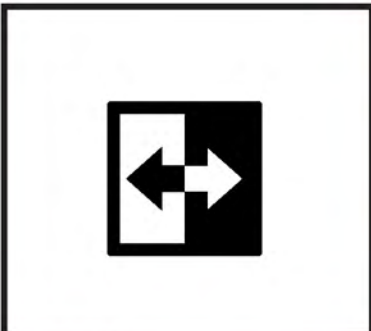

STEP 33

Please repeat the steps from 1 to 32 for the opposite side



STEP 34

The installation now is complete