

SPEC-D *Tuning*

2007-2009 TOYOTA CAMRY PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

-  1/4" Ratchet
-  6" Extension
-  Trim Pad Remover
-  10mm socket

Product Part Numbers:

2LHP-CAM07JM-RS

2LHP-CAM07G-RS

2LHP-CAM07-RS



TOYOTA CAMRY PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.



1. Before



2. (6) 10mm bolts location



3. Remove the (6) 10mm bolts



4. Plastic clip location



5. Remove the plastic clip



6. Pull the fender liner aside



7. Remove the 10mm bolt



8. (2) 10mm bolt, (2) plastic clip, and (2) phillips screws location



9. Remove the 10mm bolt



10. Remove the (2) phillips head screw



11. Remove the (2) plastic clips



12. Remove the front bumper



13. Remove the 10mm bolt



14. (2) 10mm bolts location



15. Remove the (2) 10mm bolts



16. Disconnect the headlight harness



17. Remove the light socket



18. Install the light sockets into new headlight



19. Connect the headlight harness to the new headlight
Please see the " HALO and L. E. D. head lights installation instructions"
If your head lights don't have HALO and L.E.D. You can skip the installation instruction.




20. Place the new headlight in the stock location



21. Replace the front bumper



22. Replace the plastic (2) clips

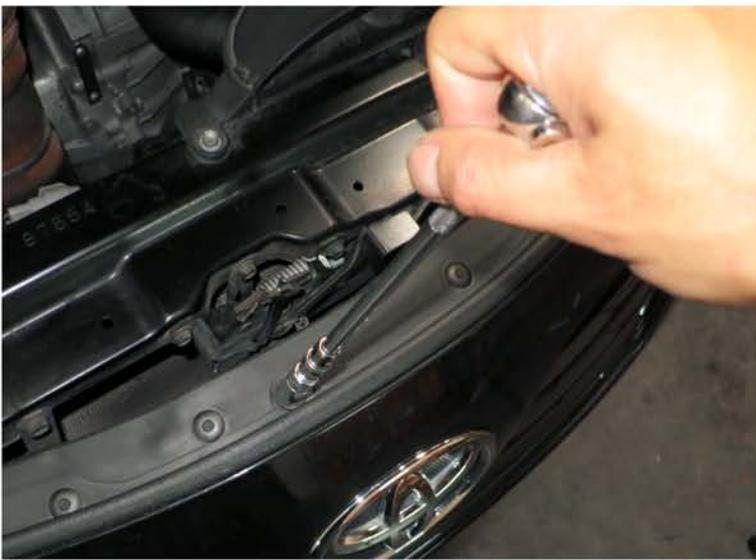

23. Tighten the 10mm bolt



24. Tighten the (2) phillips head screws



25. Tighten the 10mm bolt



26. Replace the plastic clip



27. Tighten the (6) 10mm bolts
Please repeat the steps from 1 to 27 for the opposite side



28. The installation is now complete