

SPEC-D *Tuning*

2011-2013 TOYOTA HIGHLANDER PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

TOOLS AND SUPPLIES REQUIRED

3/8" Drive Ratchet

6" Extension

10mm Socket

Flat Tipped Screwdriver

If your Headlight is Halo type, you also need:

Wire Stripper

Wire Crimper

4 Blue Quick Splice Wire Connectors

4 Blue Male Quick Wire Connectors

4 Blue Female Quick Wire Connectors

2 Red Wires (8 inch)

2 Black Wires (8 inch)

Product Part Numbers:

2LHP-HLDR11JM-RS

2LHP-HLDR11-RS

2LHP-HLDR11G-RS



2011-2013 TOYOTA HIGHLANDER PROJECTOR HEADLIGHTS INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop


Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautions when working with the bumper or any parts belonging to the vehicles's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.

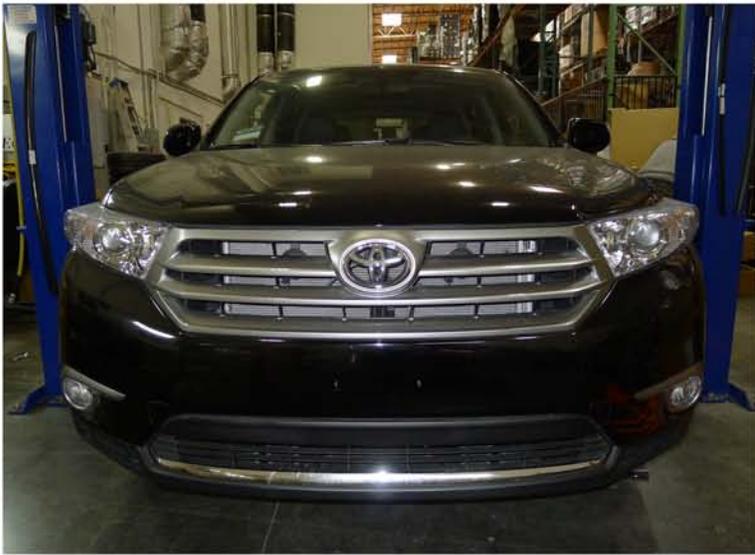

1. Before



2. (8) 10mm bolts location



3. Remove the (8) 10mm bolts



4. (2) plastic clips location



5. Remove the (2) plastic clips



6. 10mm bolts locaiton



7. Remove the 10mm bolt



8. Pull the bumper aside



9. Disconnect the fog light harness



10. (11) plastic clips location



11. Remove the plastic cover



12. (6) plastic clips location



13. Remove the (6) plastic clips



14. Release the retaining tabs then remove the front grill



15. Retaining the tabs location



16. Retaining the tabs location



17. (3) plastic clips location



18. Remove the (3) plastic clips



19. Remove the front bumper



20. Remove the 10mm bolt



21. Remove the (2) 10mm bolts



22. Remove the factory headlight



23. Disconnect the headlight harness



24. Connect the headlight harness

Please see the " Halo and L. E. D. headlights installation instructions"
If your headlights don't have Halo and L. E. D. You can skip the installation instruction.



25. Tighten the (2) 10mm bolts



26. Tighten the 10mm bolt



27. Replace the front bumper



28. Replace the (3) plastic clips



29. Replace the front grill



30. Replace the (6) plastic clips



31. Replace the plastic cover



32. Replace the (11) plastic clips



33. The installation now is complete