

SPEC-D
Tuning

1999-2004 FORD MUSTANG LED TAIL LIGHTS

INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.

An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.



TOOLS AND SUPPLIES REQUIRED

Trip Pad Remover

11mm Box Wrench

Flat Head Screwdriver

Product Part Numbers:

LT-MST99JMLED-DP

LT-MST99CFLED-DP

LT-MST99CLED-DP



1999-2004
FORD MUSTANG TAIL LIGHTS
INSTALLATION INSTRUCTIONS

If you experience any difficulties that the instruction did not cover, Please seek assistance at a local automotive shop

Please wear protection before you work on any vehicle.



An assistant is useful when removing the front bumper from your vehicle.

Please be cautious when working with the bumper or any parts belonging to the vehicle's body to prevent scratching.

Do not make direct contact with the halogen bulbs or the wire assembly until the unit has cooled down after use.



1. (4) plastic clips location



2. Remove the (4) plastic clips



3. Remove the plastic moulding



4. Remove the plastic flat head clip



5. Remove the rear trunk liner



6. Remove the side trunk liner



7. (4) 11mm nuts location



8. Remove the (4) 11mm nuts



9. Remove the tail light



10. Remove the light harness and the bulbs




11. Leave the reverse light bulb in the socket

please see the "L.E.D. tail lights installation instruction"

If your tail lights don't have L.E.D. You can skip the installation instruction.



12. Plug the tail light harness into the LED tail light

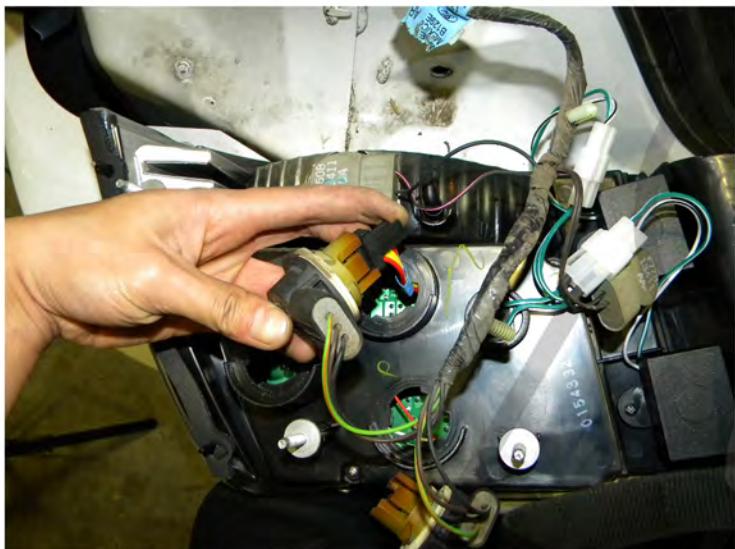

13. Plug the tail light harness into the LED tail light



14. Plug the tail light harness into the LED tail light



15. Place the LED tail light into the stock location



14. Tighten the (4) 11mm nuts



17. Replace the side trunk liner



18. Replace the rear trunk liner



19. Tighten the plastic flat head clip



20. Replace the plastic molding and secure it with the (4) plastic clips



21. Please repeat the steps in order from 1 to 20 for the opposite side



22. The installation is now complete